




## Industrial Manipulators



WEIGHT CAPACITY  
**200 Kg**

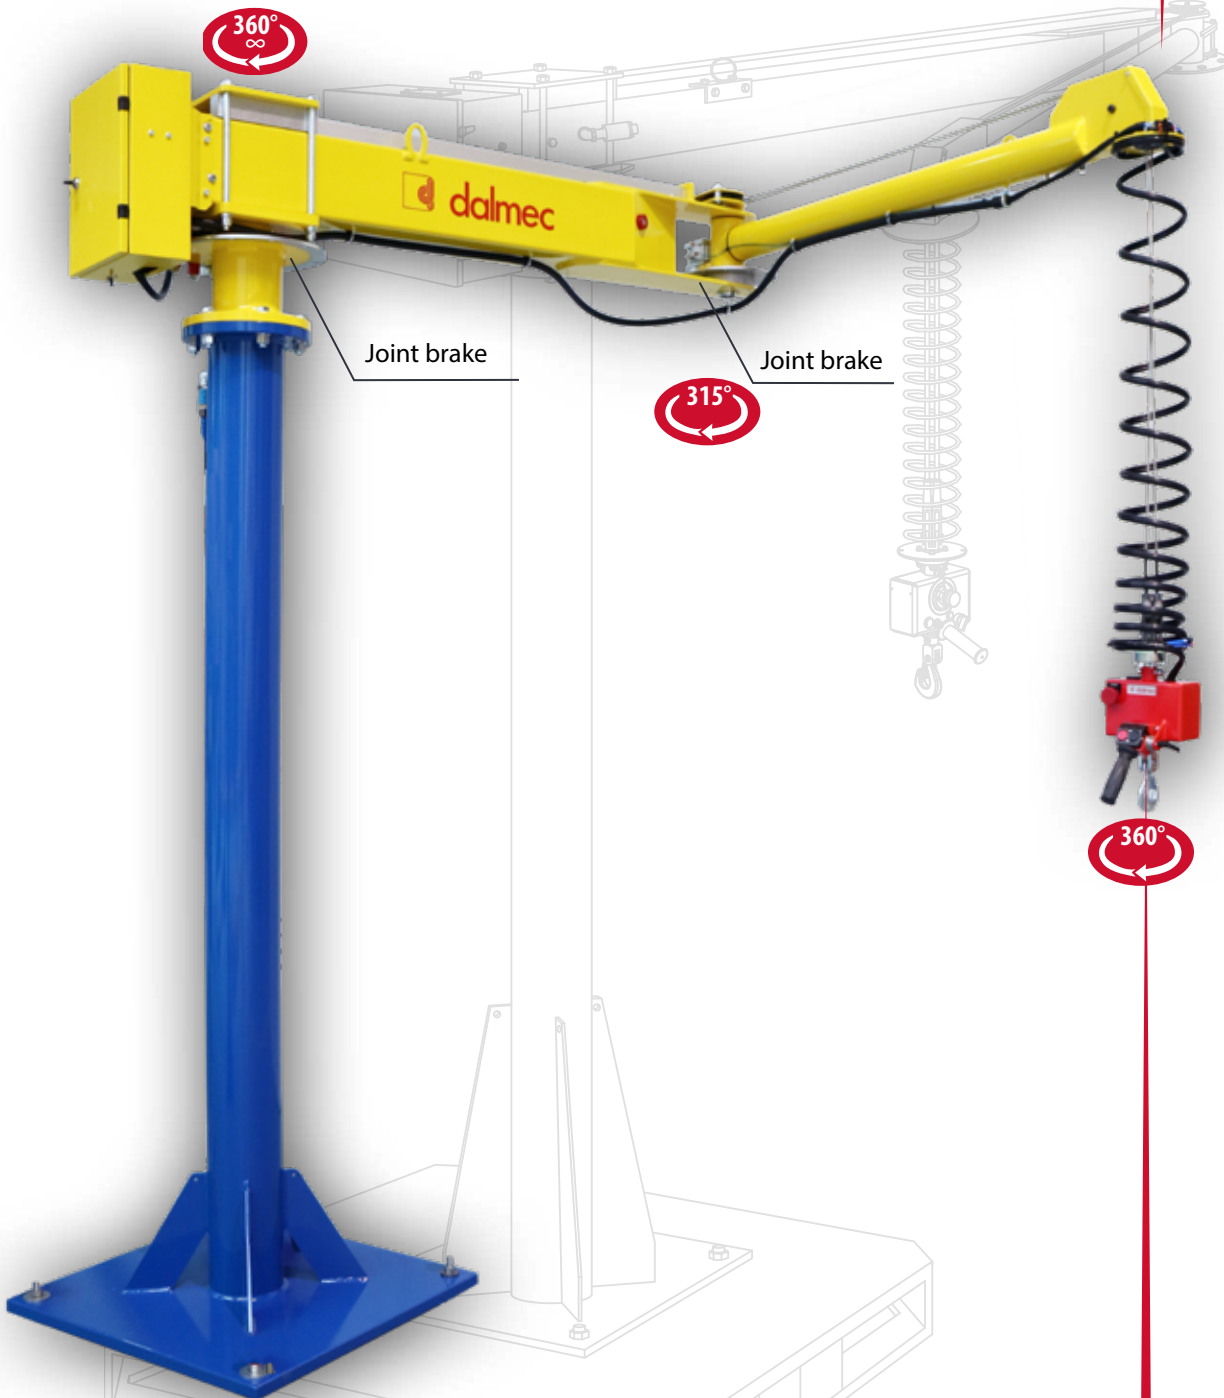

RADIUS  
**4500 mm**



PRESSURE  
**0.7-0.8 Mpa**



VERTICAL LIFT  
**1900 mm**




VERSIONS  
COLUMN  
FIXED  
OVERHEAD  
RUNNING  
OVERHEAD

Pneumatic Manipulator **POSIPLUS PP** with double cable


POSIPLUS PP, is a double cable manipulator with high load capacities, it is able to handle loads up to 200 kg and reaches working radii up to 4500 mm. The gripping tool is connected to the balancing group through two independent steel cables to ensure maximum safety. The particular double-arm structure with intermediate joint makes it easy to operate within the entire working area. Specific brakes mounted on the main joints guarantee control of drift movements.

# POSIPLUS<sup>®</sup> - PP

## Posiplus column mounted - PPC

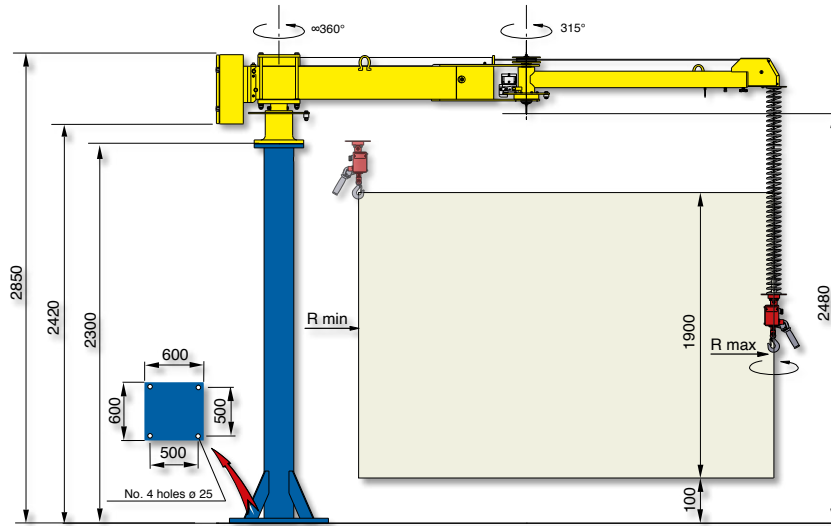


Structural versions: column mounted on fixed base-plate, autostable base-plate of our supply properly dimensioned.

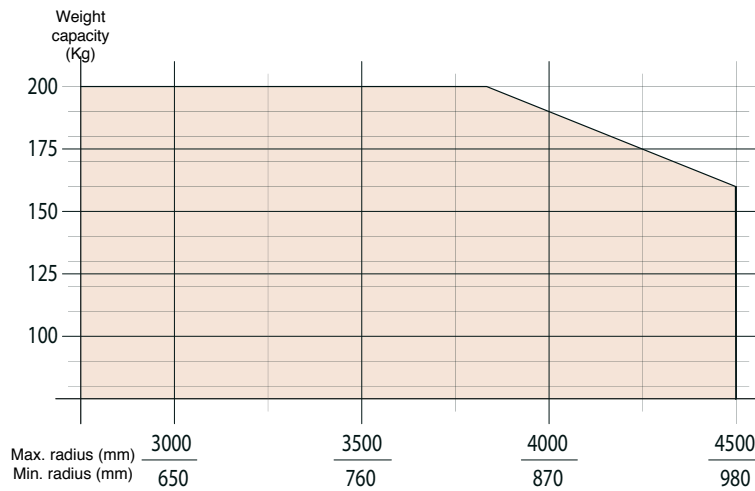


## Posiplus

### overhead mounted - PPF

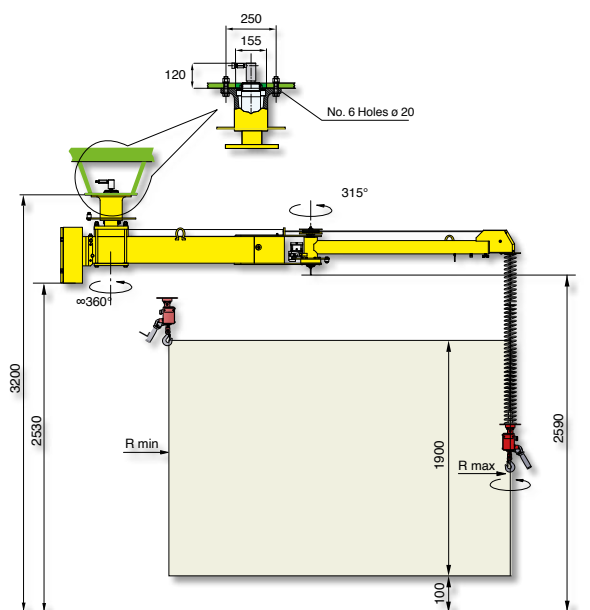

### trolley mounted - PPS

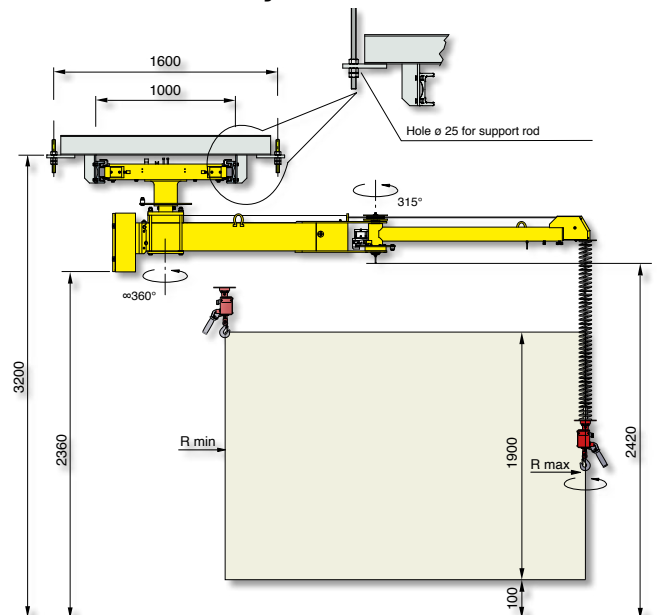

Air supply: dry and oil-free compressed air min. constant 0.7-0.8 MPa